



Residential Aluminium

Bi-Folding Doors

Sliding Doors

SlimLine Windows

Residential Doors

Lantern Roofs

Commercial Aluminium

Commercial Windows

Commercial Doors

Curtain Walling

Shop Front

Trade Only Fabricators

" We carry the stock,
so you don't have to! "



Any Size

Any Colour


Any Configuration

3 Week delivery

Bi-Folding Doors



OPENING CONFIGURATIONS

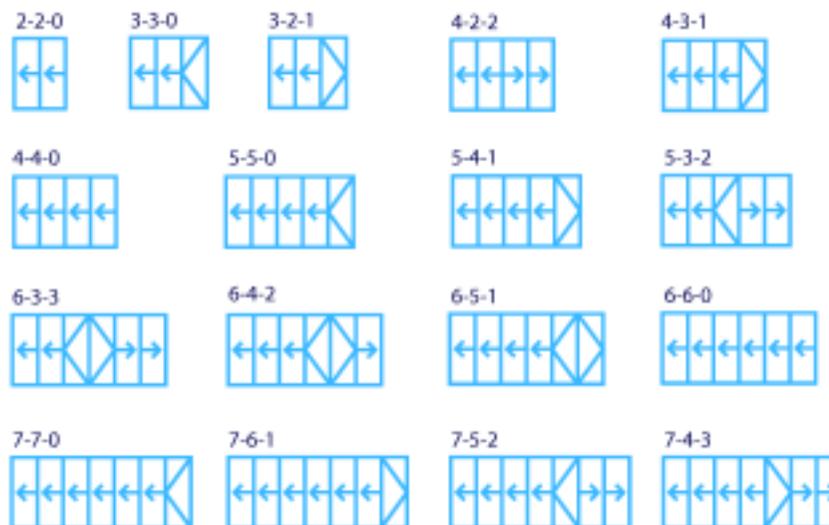

OPTIONS:

- >> Supplied with or without glass.
- >> Our standard glass has a centre pane U-value of 1.2
- >> Full range of suited hardware.
- >> Hoppe Atlanta traffic door handle.
- >> Any of the above 17 styles can open IN or OUT.






BI-FOLDING DOORS SPAN CHART

Overall Door Height (mm)	600 Pa		680 Pa		1800Pa		1200 Pa		1400 Pa		1600 Pa		1800 Pa		2000 Pa	
	P-06-200 Max. Pane / Width (mm)															
3800	800	800	3000	600	3000	600	3000	600	3000	-	3000	-	3000	-	3000	-
2800	1000	1000	2800	800	2800	650	2800	550	2800	450	2800	400	2800	350	2800	300
2600	1200	1200	2600	1100	2600	850	2600	700	2600	580	2600	550	2600	450	2600	400
2400	1200	1200	2400	1200	2400	1100	2400	1000	2400	800	2400	750	2400	650	2400	600
2200	1200	1200	2200	1200	2200	1200	2200	1200	2200	1200	2200	1050	2200	950	2200	900
2000	1200	1200	2000	1200	2000	1200	2000	1200	2000	1200	2000	1200	2000	1200	2000	1200
1800	1200	1200	1800	1200	1800	1200	1800	1200	1800	1200	1800	1200	1800	1200	1800	1200
1600	1200	1200	1600	1200	1600	1200	1600	1200	1600	1200	1600	1200	1600	1200	1600	1200
1400	1200	1200	1400	1200	1400	1200	1400	1200	1400	1200	1400	1200	1400	1200	1400	1200
1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
1000	1200	1200	1000	1200	1000	1200	1000	1200	1000	1200	1000	1200	1000	1200	1000	1200







NOTE: increased panel size to 1200mm wide. Wind load (Pa), glass weight, door height, max profile inertia are all relevant factors when calculating panel widths.

Bi-Folding Doors

OUTER FRAMES, THRESHOLDS







SASH



CILLS, DRAINAGE TRAY

BEADS, ADDON







Residential Windows



SlimLine Windows, 45mm Sash, AW686






Hoppe Tokyo casement window handles






Tilt before Turn sash, AW605




OUTER FRAMES






CILLS



SASHES






BEADS






This represents the basic profile suite. Please ask for full technical information and section drawings when required.

Sliding Patio Doors


PREMIUM SLIDER

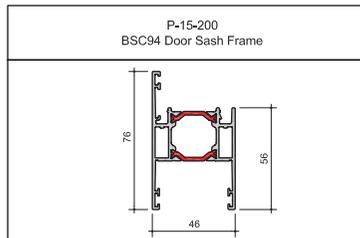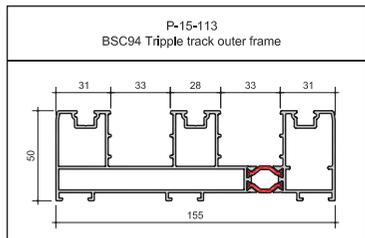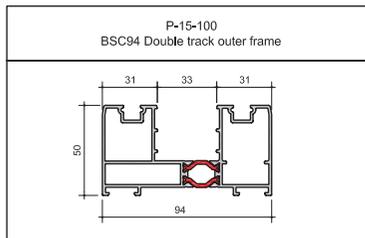

PATIO

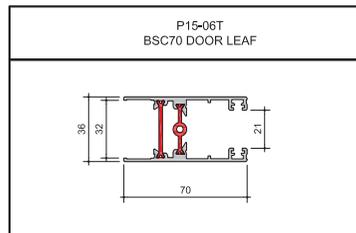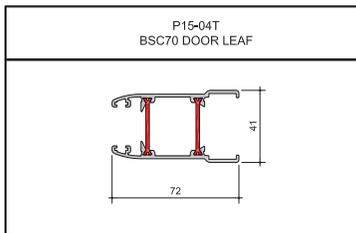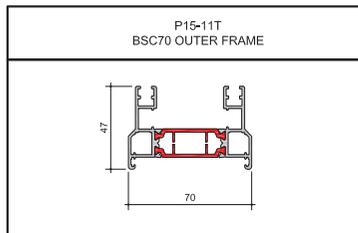

French Doors

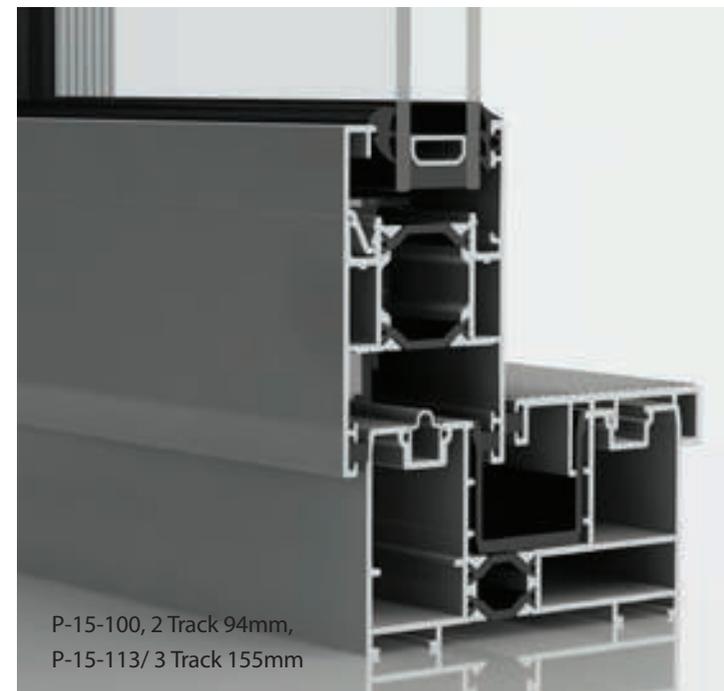





Commercial Doors









Thermal Commercial Door. GT55 TB



Non Thermal Commercial Door. GT55

PROFILES




GT55 and GT55 TB are non thermal and thermally broken commercial doors and glazing. They are engineered for use as a Ground Floor Treatment and are commonly used in small and medium scale commercial glazing applications.


SL52 is a full Curtain Wall product intended for glazing at height, on larger scale commercial glazing contracts.

Individual calculations are required for glazing at height.

Commercial Windows and Curtain Walling

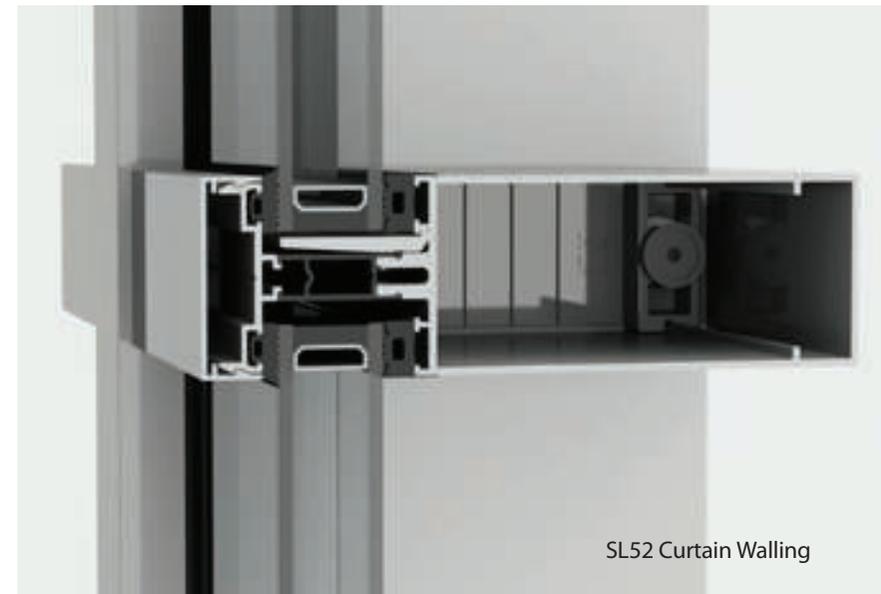

SL52 Curtain Walling

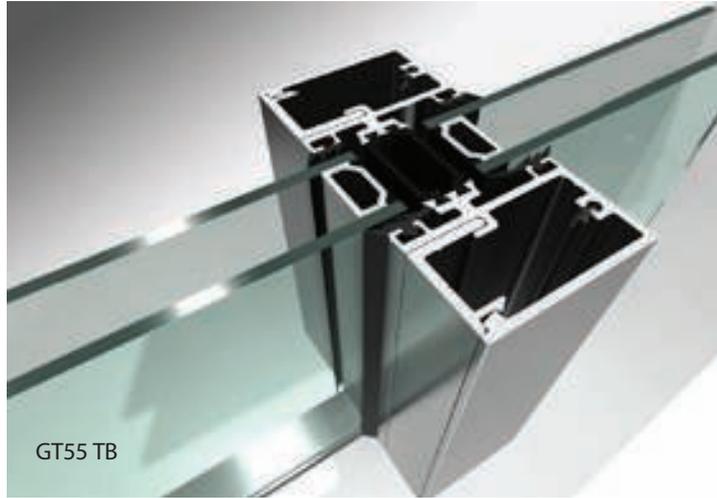

GT55 TB



AW620 Commercial Sash





Any Size
Any Colour
Any Configuration
3 Week delivery

Please note: Our product range is under constant development. The information contained in this brochure was correct at the time of going to print, but it may change from time to time. We can provide a full, written quotation for each enquiry, which will contain up to date product specifications. Please ask for cross sections drawings when required, to accompany quotations.